

## CONSIDUS - Innovation in Air Drying

Economic dry storage systems

# CONSIDUS Dry Storage



### Description

The CONSIDUS dry storage systems from ASYS offer optimum protection for highly sensitive components and assemblies. They are used when storage is required under defined conditions of humidity or for active component drying.

**CONSIDUS Dry Storage** can be used for a variety of storage products such as electronic components, partially assembled electronic modules, circuit boards, foils, wafers and components with oxidation-sensitive surfaces. Three different dehumidification technologies are available to achieve the stable and dry atmosphere in CONSIDUS Dry Storage.

#### 1. Adsorption dehumidification

Controlled drying and circulating of air with a powerful adsorption drier. Closed recirculation system with high air circulation rates. Additional option of installing a heating module of up to 40 °C for stress-free component drying.

#### 2. Nitrogen dehumidification

Controlled feeding of nitrogen.

#### 3. Compressed-air dehumidification

Controlled feeding of compressed air.

### Customised solutions


In addition to proven standard products, ASYS Cleanroom Technology supplies individual customer-specific solutions flexibly customised to meet any requirement.

### Equipment:

- \_ Solid metal corpus
- \_ ESD version
- \_ Ergonomic door handles
- \_ Dehumidification techniques with fast reactions

### Options:

- \_ Visual and audible alarms
- \_ Data logging for documentation of moisture and temperature
- \_ Lockable doors
- \_ 3-chamber system (entire cabinet volume divided into three independent individual chambers)
- \_ Stainless steel shelves (up to 50 kg load capacity)
- \_ Installation of pull-out drawers
- \_ Installation of SMD roll holders
- \_ Installation of feeder banks
- \_ Installation of a temper oven up to 125 °C
- \_ Heating module to heat the corpus up to 40 °C
- \_ Extended cabinet depth (to 1100 mm)
- \_ Installation of a dryer unit for compressed air conditioning
- \_ Recalibration of probes
- \_ Traceability software
- \_ Stainless steel version
- \_ Acrylic glass version
- \_ Additional options on request

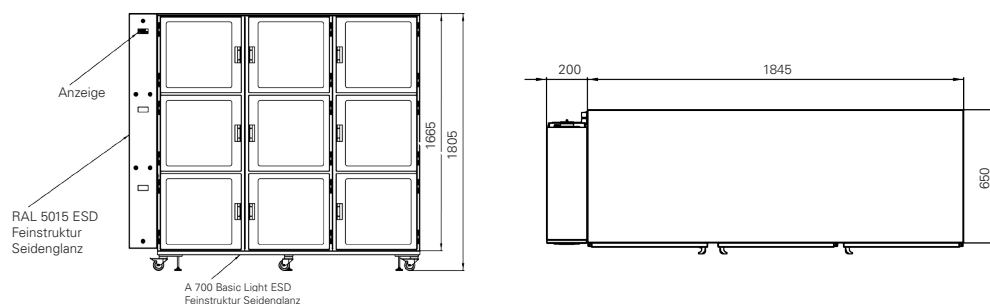

## CONSIDUS Dry Storage

Type label	Typ 600M <sup>c)</sup>	Typ 1200M	Typ 1800M	Typ 2400M
<b>External dimensions</b> in mm (WxHxD) <sup>a)</sup>	815 x 1805 x 650	1430 x 1805 x 650	2045 x 1805 x 650	2660 x 1805 x 650
<b>Number of doors</b>	3 (2) <sup>b)</sup>	6 (5) <sup>b)</sup>	9 (8) <sup>b)</sup>	12 (11) <sup>b)</sup>
<b>Storage volume</b> in litres	625 (410) <sup>b)</sup>	1250 (1040) <sup>b)</sup>	1875 (1670) <sup>b)</sup>	2500 (2300) <sup>b)</sup>
<b>Usable size per compartment</b> in mm (WxHxD)	540 x 510 x 620			
<b>Dehumidification technologies</b>	Adsorption dehumidification / nitrogen feed-in / compressed air feed-in			
<b>Applications</b>	Residual humidity of less than 3 % RH			
<b>Cabinet material</b>	Metal			
<b>Connection specifications</b>	Nitrogen: 3 bar / Compressed air: 6 - 8 bar			
<b>Electrical connection</b>	230 V / 50 Hz			
<b>Control</b>	Automatic control with measurement and control technology and calibrated humidity sensor. Humidity setpoint freely adjustable. Indication of current humidity and temperature on the display. Dehumidification takes place only when exceeding the predetermined humidity setpoint.			

a) Individual dimensions on request

b) With adsorption dehumidification

c) Only nitrogen / compressed air dehumidification

**ASYS  
GROUP**

力丰电子|北京市西城区阜成门外大街2号万通新世界广场A1903室。

北京: 010 - 6857 8968

上海: 021 - 5046 1011

深圳: 0755 - 8832 1879

Subject to change.

All information listed is general descriptions and performance features which in actual case of use do not always apply in the form shown or which may change due to ongoing product development. Only the contractually agreed performance descriptions are considered binding.

Printed in Germany