


Reel-Container for the transport of component reels

MATERIAL LOGISTICS

Reel-Container / Reel-Tray-Container

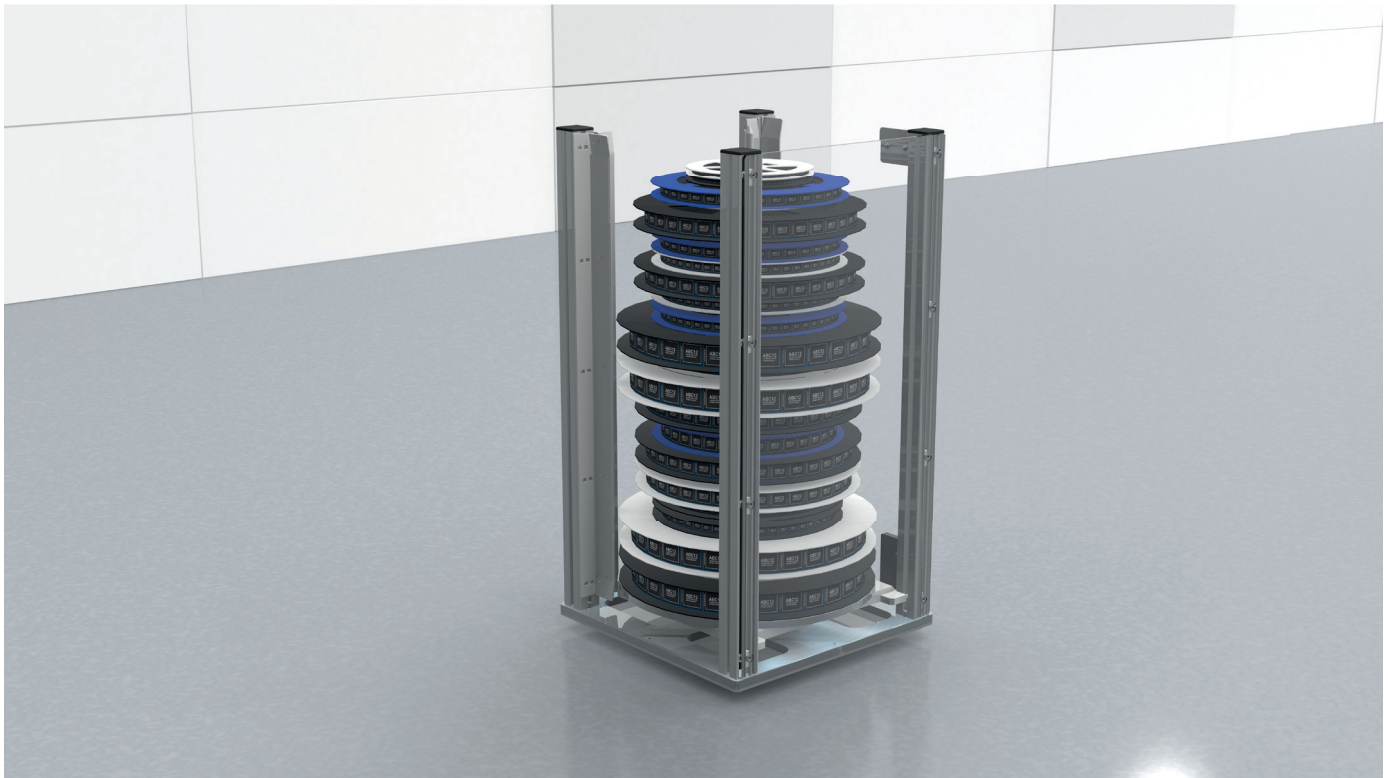




Description:

The Reel-Container is a container to hold a certain number of component reels. The exact number depends on the thickness of the reels. The centering of the component reels is done via the standardized central hole in the reels, which are fixed via the spike of the container. The Reel-Tray-Container can also hold JEDEC trays in addition to the component reels. The trays are stored at one side of the spike, guided by additional rails in the container. The reels/ trays can be loaded/unloaded manually or by a MLO Loading or MUL Unloading system.

Features:

- _400x400mm container
- _smd component reels: D=177-381mm, H=10-110mm
- _centering spike for reels
- _guiding rails for trays
- _moveable platform
- _safety cover 1-sided
- _safety switch for loading/unloading

Reel-Container / Reel-Tray-Container | Technical Data

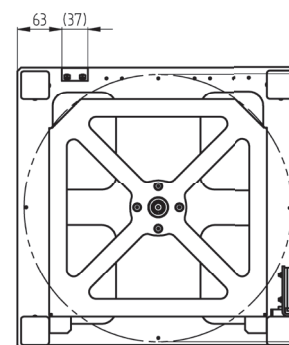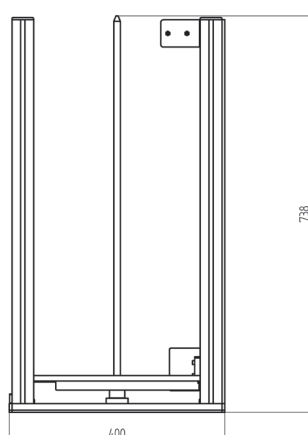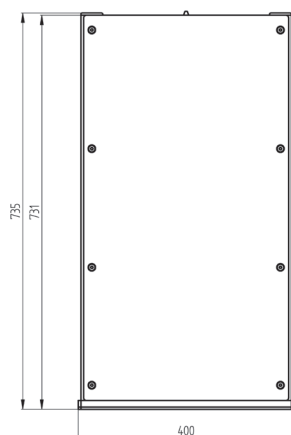

	Reel-Container	Reel-Tray-Container
Machine Configuration		
Number Reels, max.	60 (at H=10mm)	60 (at H=10mm)
Number Trays stacks, max.	-	24 (at H=25mm)
Reel Format		
Transport good length (mm)	177 to 381	177 to 381
Transport good width (mm)	177 to 381	177 to 381
Transport good height (mm)	10 to 110	10 to 110
Transport good weight, max. (kg)	3	3
Tray Format		
Transport good length (mm)	-	322,6
Transport good width (mm)	-	135,89
Transport good height (mm)	-	25 or 50
Transport good weight, max. (kg)	-	3
Machine Description		
Length (mm)	400	400
Width (mm)	400	400
Height (mm)	738	738
Netto weight (kg)	15	16
Overall weight, max. (kg)	35	35
Material	Al + Eslon + VA	Al + Eslon + VA

力丰电子|北京市西城区阜成门外大街2号万通新世界广场A1903室。

北京: 010-6857 8968

上海: 021-5046 1011

深圳: 0755-8832 1879

Subject to change without notice.
Some general descriptions and performance characteristics may not be applicable to all products. Technical specifications are subject to change without notice. Only features and technical data provided in purchasing contract are legally binding.

Printed in Germany

**ASYS
GROUP**